

## iDS-6716NXI-P1 DeepinMind Pro NVS



- Up to 2-ch@32 MP/2-ch@24 MP/4-ch@12 MP/8-ch@8 MP/16-ch@4 MP decoding capacity
- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on Guanlan Large-Scale AI Models
- Up to 16-ch IP cameras can be connected
- Up to 16-ch AcuSeek and AcuSearch function
- Up to 16-ch perimeter protection
- Up to 16-ch facial recognition for video stream, or up to 16-ch facial recognition for face picture
- Up to 16-ch video structuralization
- Up to 8-ch IP speakers can be connected

## ▪ Specification

<b>Intelligent Analytics</b>	
AI by NVR	Facial recognition, perimeter protection, video structuralization, AcuSearch, AcuSeek
AI by Camera	Facial recognition, perimeter protection, video structuralization, AcuSearch, motion detection2.0, ANPR, people counting, VCA
Engine	<p>1 GPU Engine, only for AcuSeek and OVD</p> <p>2 GPU Engines, each GPU engine can run an intelligent algorithm, engine mode is adjustable, performance of each GPU engine (choose 1 from 4):</p> <p>Facial recognition: 8-ch (4MP) video target capture or 16-ch image comparison</p> <p>Perimeter prevention: 12-ch (2MP) video analysis or 16-ch image analysis</p> <p>Video Structuralization: 8-ch (2MP) video structured analysis</p> <p>AcuSearch: support 16-ch (2MP) by NVR</p> <p>Note: To enable AcuSeek, at least one engine must be enabled in AcuSearch mode.</p>
<b>Facial Recognition</b>	
Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
Face Picture Library	Up to 32 face picture libraries, up to 100,000 face pictures in list library
Face Picture Comparison (Captured from Camera)	16-ch; (32-ch for each engine); Comparison speed: 32 pictures per second
Facial Detection and Analytics Performance	16-ch(2MP-8ch./4MP-8ch./8MP-4ch. for each engine face pictures captured by NVR)
<b>AcuSearch</b>	
By NVR	Up to 16ch-2MP/8ch-4MP/4ch-8MP normal IP camera access to achieve AcuSearch.(1 GPU engine for target capture, 1 GPU engine for AcuSearch modeling)
By Camera	All channels, up to 600,000 targets/day The camera should enable AcuSearch function
<b>AcuSeek</b>	
Performance	<p>The NVR supports 16ch-2MP/8ch-4MP/4ch-8MP normal IP camera access to achieve AcuSeek.(1 GPU engine for target capture, 1 GPU engine for AcuSearch modeling, 1 GPU engine for AcuSeek modeling)</p> <p>If the cameras support Hikvision AcuSense Technology and have enabled AcuSearch function, the NVR supports AcuSeek in all channels, capable of modeling 600,000 targets/day.</p>
Search Language	English, French, Italian, German, Polish, Portuguese, Thai, Russian, Arabic, Turkish, Spanish
<b>Perimeter Protection</b>	
By NVR	<p>Perimeter protection powered by Large Model: 12-ch 2 MP or 8-ch 4MP or 4-ch 8MP. ( 1 GPU engine for live video analysis, 1 GPU engine for lager model algorithm secondary analysis, capable of secondary analysis is 2 events/s)</p> <p>perimeter protection without Large Model: 24-ch 2 MP or 16ch-4MP or 8-ch 8MP</p>
By Camera	Perimeter protection powered by Large Model with AcuSense cameras: All channels
<b>Video Structuralization</b>	
Structured Analysis	<p>16-ch 2 MP</p> <p>12-ch 4 MP</p> <p>6-ch 8 MP</p>

ANPR	
By Camera	<p>All channels</p> <p>Support Countries &amp; Regions:</p> <ol style="list-style-type: none"> <li>1. Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia</li> <li>2. Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein</li> <li>3. Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia, Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon</li> <li>4. Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya</li> </ol>
Plate Attributes	Vehicle brand, vehicle color, vehicle type
Vehicle Attributes	Plate number, license plate color, license plate type
Video and Audio	
IP Video Input	<p>16-ch</p> <p>Up to 32 MP resolution</p> <p>*: NVR supports up to 8-ch 32 MP/24 MP IP video inputs.</p>
Incoming Bandwidth	256Mbps
Outgoing Bandwidth	256 Mbps
HDMI 1 Output	8K( 7680×4320 )/30Hz ,4K( 3840×2160 )/60Hz ,4K( 3840×2160 )/30Hz ,2K( 2560×1440 )/60Hz , 1080P ( 1920×1080 ) /60Hz
HDMI 2 Output	<p>4K ( 3840×2160 ) /60Hz , 4K ( 3840×2160 ) /30Hz , 2K ( 2560×1440 ) /60Hz , 1080P ( 1920×1080 ) /60Hz</p> <p>*: When HDMI 1 output resolution is 8K, the maximum HDMI 2 output resolution is 1080p.</p>
VGA Output	1080P (1920 × 1080)/60 Hz
Video Output Mode	<p>HDMI1/VGA simultaneous output</p> <p>HDMI2/VGA independent output</p>
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)
Decoding	
Decoding Format	H.265/H.265+/H.264/H.264+
Decoding Capability	2-ch@32 MP (30 fps)/2-ch@24 MP (30 fps)/4-ch@16 MP (30 fps)/8-ch@8 MP (30 fps)
Synchronous Playback	16-ch
Recording Resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/ 2CIF/CIF/QCIF


Network	
Remote Connection	128
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF, OTAP
API	ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Auxiliary Interface	
SATA	1 SATA interface ( Pre-installed 4TB HDD)
eSATA	1 eSATA interface
Capacity	Up to 20 TB capacity for each HDD
Serial Interface	1 RS-232, 1 RS-485 (half-duplex)
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0
Alarm In/Out	16/4
General	
GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew, Farsi, Azeri, Burmese
Power Supply	12 VDC, 5A
Consumption	≤ 50 W
Working Temperature	-10 to 55° C (14 to 131° F)
Working Humidity	10 to 90%
Dimension (W × D × H)	320 × 244 × 65 mm (12.6" × 9.6" × 2.6")
Weight	≤ 3 kg (without HDD, 6.6 lb.)
Certification	
Obtained Certification	CE, IC, CB, Rohs, Reach, WEEE, RCM, UKCA, LOA
CE	EN 55032:2015+A1:2020, ENIEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020

### ▪ Available Model

iDS-6716NXI-P1(NEU)(1 × 4T)

iDS-6716NXI-P1(STD)(1 × 4T)

### ▪ Dimension

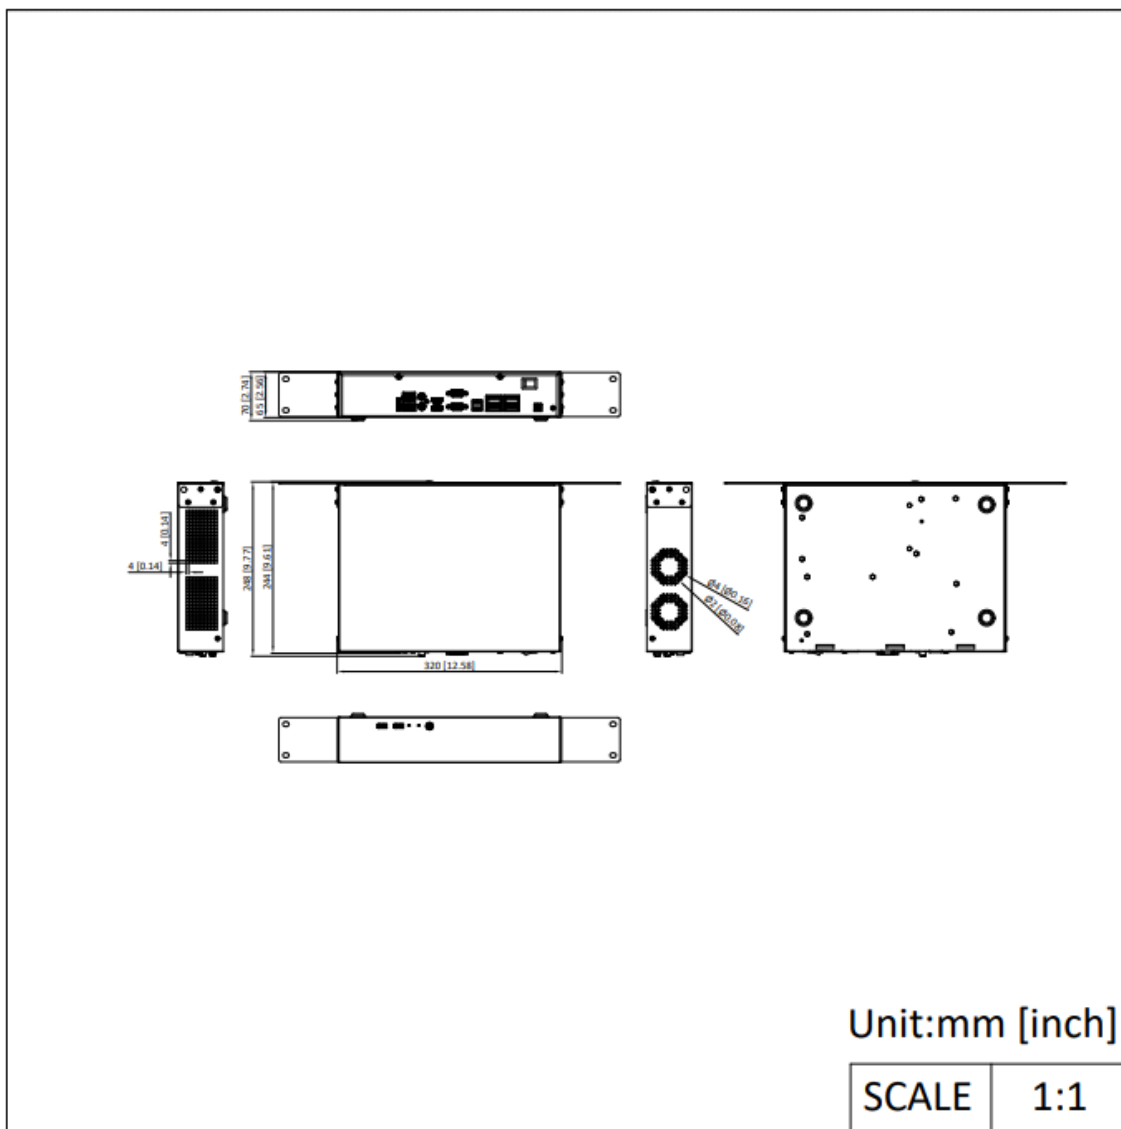

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

