



Recorder, evacuation, alarm, security or advertising message generator.

Ideal for places of worship, schools, supermarkets, airports, homes, museums, ...

Possibility of playing musical jingles as messages.

Possibility to manage WebRadio from Timer.

Possibility of creating nodes with music sequences/web radio links/messages as desired.

Activation of messages via contacts (timer or security systems such as fire or vigilance).

Timing schedules and from standard protocols via MQTT or KNXnet/IP.

MQTT: The device can be connected to an external Broker, the internal Broker can be activated for itself or for other MQTT devices.

KNXnet/IP: Communication via KNX is done via an Ethernet interface, so it is necessary to connect the device via an IP/KNX router.

Number of recordable messages: 100.

Total time: 120 minutes.

Internal memory 16GB.

Media file reading: MP3, FLAC, WAV.

Internal scheduler for programming timers by hours/days/weeks/months.

1 LAN input for network connection (management interface for files, schedules and contacts).

Remote updates.

8 Input contacts for message activation, in priority order (1st = max. priority, 8th = min. priority)

1 integrated microphone for message recording, button on front.

1 voltage-free output contact for activation of equipment with priority contact.

Function keys: volume +/-, mic, stop.

Note: Can be integrated with [Vivaldi Domotica iCONTROL4.0+](#).

Equipped with buffer battery, maintains programming in case of power failure.

Functions programmable and can be recalled from buttons via [Vivaldi Multimedia C4IO](#):

Trigger of up to 32 messages

Stop

Volume control and mute

Playback status

Mute/unmute status

Power supply 24 Vdc (Power supply not included [Vivaldi Giove AL2B](#))

Consumption: 200 mA.

Certifications: RoHS, CE.

Dimensions (WxHxD) 72x90x63 mm.

Weight 0,2 Kg


Din rail 4 modules.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice








Images

Vivaldi Ulisse GRM1

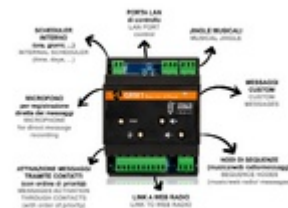

VIVALDI

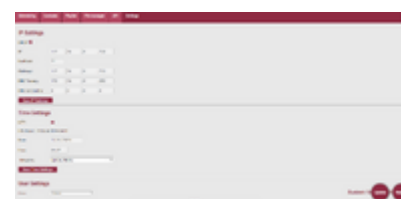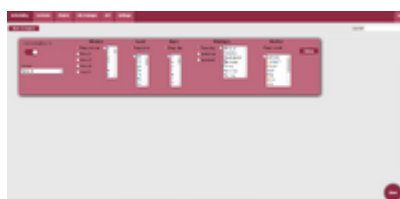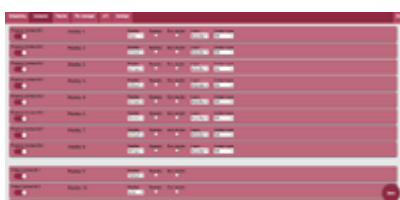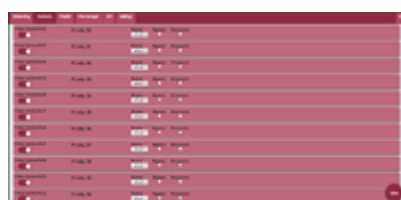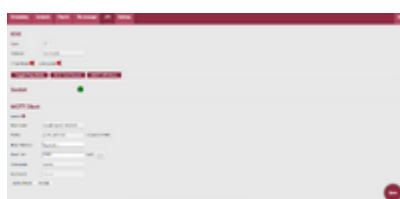

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272